

小型・拉動式・搭扣・不銹鋼


Draw Latch




- 材質：不銹鋼 304
- Material: Stainless Steel 304
- 表面處理：振動研磨
- S.Tr: Vibration Polish



TS-146

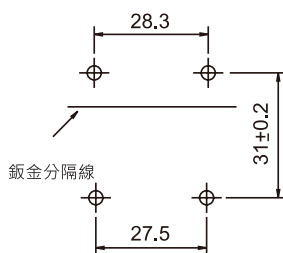

開孔尺寸 Cut Out

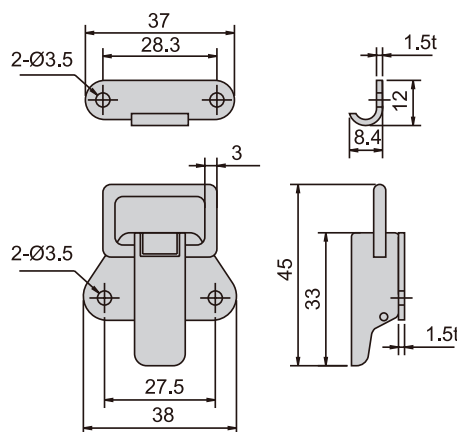

小型不銹鋼彈簧迫緊式搭扣


Spring Loaded Draw Latch · Compression





- 材質：不銹鋼 304
- Material: Stainless steel 304
- 表面處理：震動拋光
- S.Tr: Vibration Polish
- 裝置彈簧，可迫緊物件
- With spring compression function



TS-33

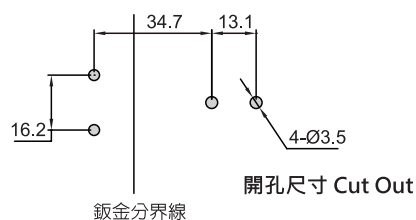


鍍金分界線

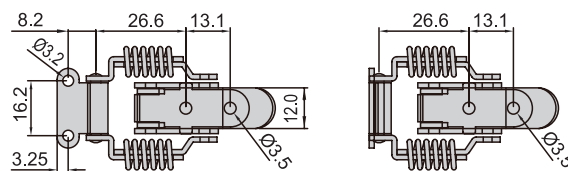


TS-33A 水平安裝座




TS-33B 垂直安裝座



水平安裝示意圖



垂直安裝示意圖

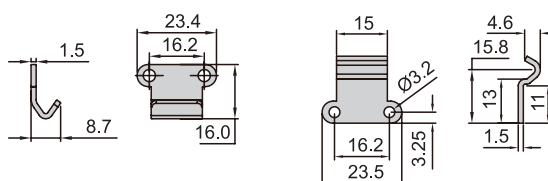


不銹鋼搭扣

Stainless steel · Draw Latches



- 材質：不銹鋼 304
- Material : Stainless steel 304
- 表面處理：震動研磨
- S.Tr: Vibration Polish

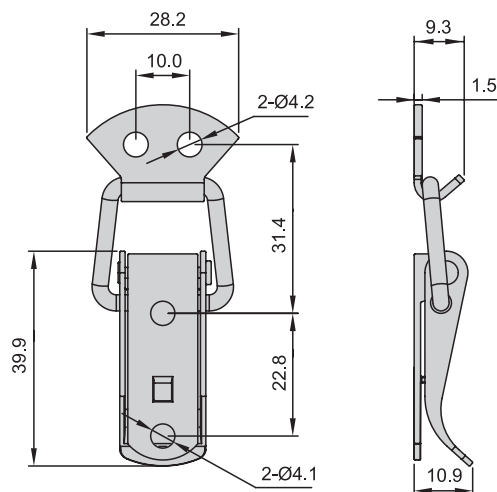

搭扣、門檔、
磁鐵門吸

DRAW LATCHES




TS-17

不銹鋼 · 壓縮 · 帶安全扣裝置


Stainless steel · Compression



- 內置鎖緊彈簧
- 材質：不銹鋼 304
- Material: Stainless Steel 304
- 物件鎖定後，利用防鬆扣拉緊手柄，避免意外開啟
- With anti-slip hook to tighten the grip and prevent accidental loosening
- 最大靜載荷：800N
- Maximum Static Load:800N

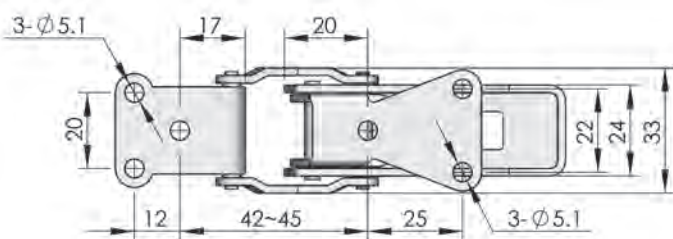

TS-605







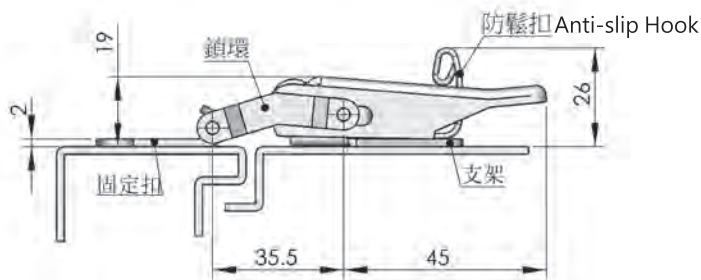


迷你型不銹鋼彈簧壓縮型搭扣

Compression Draw Latch · Mini Type



- 材質：不銹鋼 304
- Material : Stainless Steel 304
- 表面處理：震動拋光
- S.Tr : Vibration polish finish
- 內部裝置彈簧，可迫緊物件
- Spring loaded for strong compression function



TSL-163-3

TSL-163-7


- 使用 M2.5 皿頭螺絲
- Use M2.5 screws

提轉型搭扣 · 帶鎖芯


Rotary Action Draw Latches With Lockcore





- 材質：鋼鐵、不銹鋼
- Material : Steel · Stainless steel
- 表面處理：鍍鋅
- S.Tr : Zinc Plated



TS-180



開孔尺寸 Cut Out

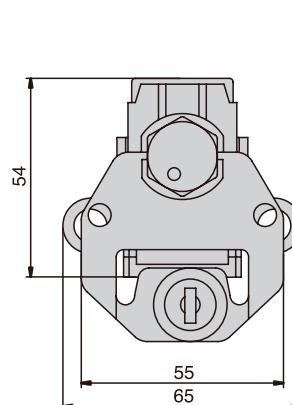



型號 Item No	材質 Material
TS-180	鋼鐵 Steel
TS-180-SS	不銹鋼 304 Stainless steel304

搭扣 · 可調間距 · 帶防鬆扣



Adjustable grip · With anti-slip hook



- 可調間距設計 · 配置防鬆扣防止意外開啓
- Adjustable design, with anti-slip hook to prevent accidental loosening
- 最大靜載荷：430N
- Maximum Static Load : 430N

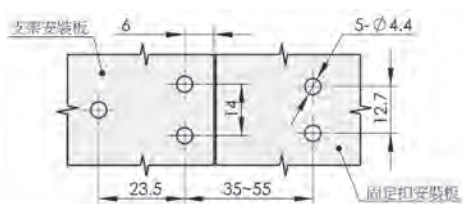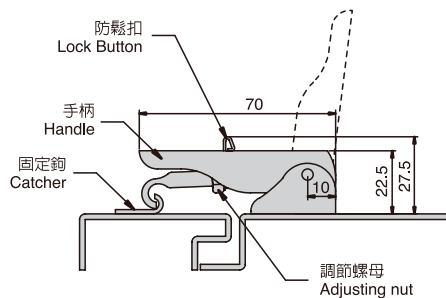

開孔尺寸 Cut Out

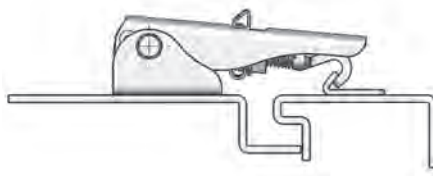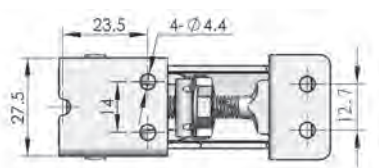

型號 Item No	材質 Material
TS-602-3B	鋼鐵 Steel
TS-602-3B-S	不銹鋼 304 Stainless steel 304

搭扣、門檔、
磁鐵門吸

DRAW LATCHES



TS-602-3B (鋼鐵)




TS-602-3B-S (不銹鋼)

不銹鋼 · 彈簧壓縮型搭扣 · 附掛鎖孔


Spring Loaded Draw Latch · Compression




- 材質：不銹鋼 304
- Material: Stainless Steel 304
- 裝置彈簧 · 壓縮夾持物件
- Installed with spring inside for powerful compression
- 夾持力：20 kgf
- Static Load : 20 kgf



掛鎖安裝示意

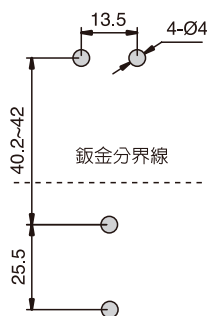


開孔尺寸 Cut Out

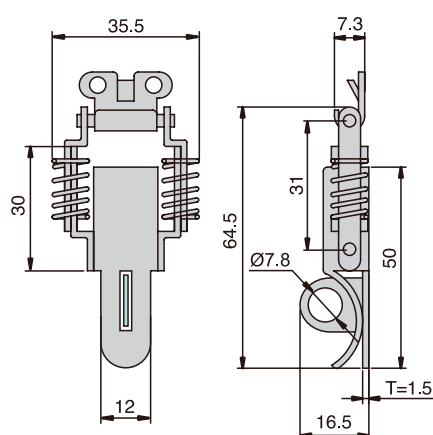

TSL-3071

提轉型搭扣

Rotary · Draw Latch




TS-153



- 材質：鋼鐵或不銹鋼 304
- Material : Steel or Stainless Steel 304
- 表面處理：鍍鋅或震動拋光
- S.Tr: Zinc Plated or Vibration Grind



型號 Item No	材質 Material
TS-153	鋼鐵 Steel(常規)
TS-153-SS	不銹鋼 304 Stainless steel 304

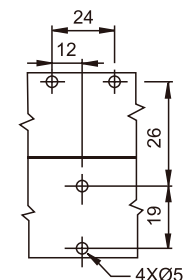

開孔尺寸 Cut Out

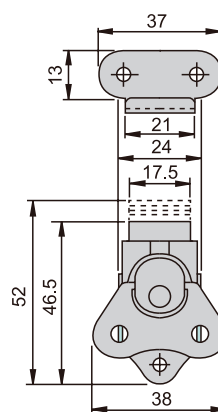


TS-156-1



- 材質：鋼鐵或不銹鋼 304
- Material: Steel or Stainless Steel 304
- 表面處理：黑色塗裝、震動拋光
- S.Tr : Black powder coated or Vibration Polish
- 抬起手柄轉動，使滑片伸縮
- To operate · lift the wing and turn
- 最大工作載荷：700N
- Max working load : 700N



型號 Item No	材質 Material
TS-156-1	鋼鐵 Steel
TS-156-2	不銹鋼 304S Stainless steel 304

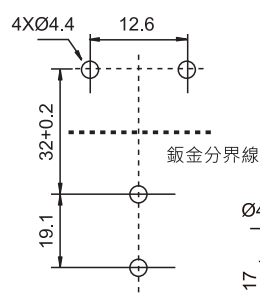

開孔尺寸 Cut Out

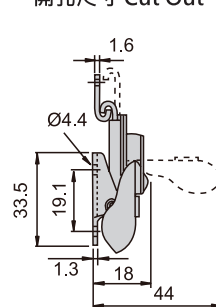


TS-156-2

提轉型搭扣

Rotary · Draw Latch



- 材質：鋼鐵
- Material: Steel
- 表面處理：鍍鋅
- S.Tr: Zinc Plated

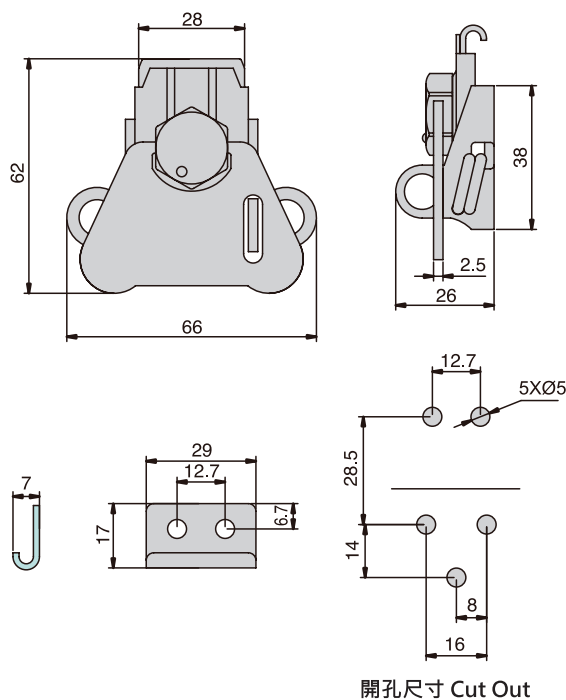

搭扣、門檔、
磁鐵門吸

DRAW LATCHES



TS-158-1





TS-158-2

大型搭扣 · 提轉式

Rotary · Draw Latch




- 材質：鋼鐵
- Material: Steel
- 表面處理：鍍鋅
- S.Tr: Zinc plated
- 滑片伸縮距離：8mm
- Adjustable latching distance: 8mm

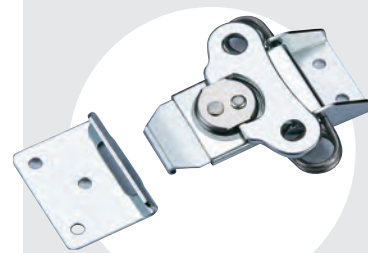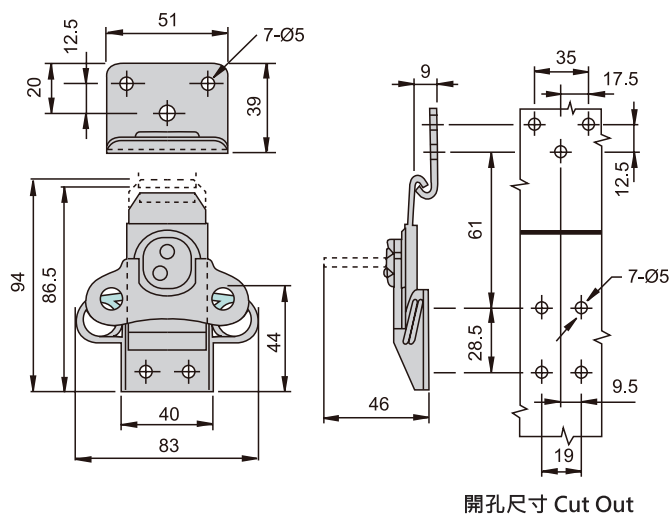

TS-2011


不銹鋼・彈簧壓縮型搭扣

Spring Loaded Draw Latch · Compression






TSL-3061

- 材質：不銹鋼 304
- Material : Stainless Steel 304
- 裝置彈簧，壓縮夾持物件
- Installed with spring inside for powerful compression




開孔尺寸
Panel Preparation
dimension

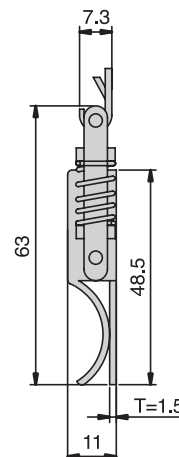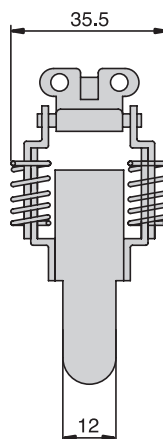







彈簧壓縮型搭扣

Spring Loaded Draw Latch · Compression



TS-168-SS

- 材質：不銹鋼 304
- Material : Stainless steel 304
- 表面處理：震動拋光
- S.Tr : Vibration Polish
- 內部裝置隱藏彈簧，可迫緊物件
- Installed with spring inside for powerful compression



彈簧壓縮型搭扣不銹鋼


Spring Loaded Draw Latch · Compression



搭扣、門檔、
磁鐵門吸


DRAW LATCHES

- 材質：不銹鋼 304
- Material : Stainless steel 304
- 裝置彈簧，壓縮鎖緊物件

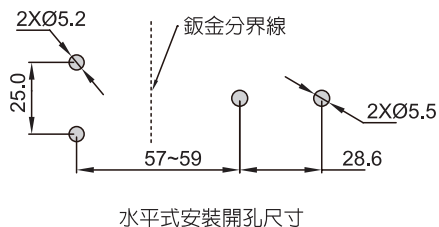


A 扣座 TSL322-A
水平安裝


掛鎖安裝孔
Padlock hole




C 扣座 TSL322-C
垂直安裝

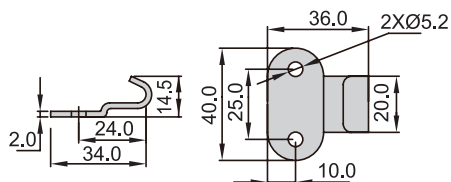


A 扣座 (TSL322-A)- 水平式安裝用

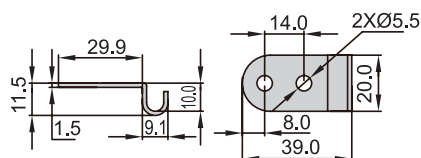

C 扣座 (TSL322-C)- 垂直式安裝用

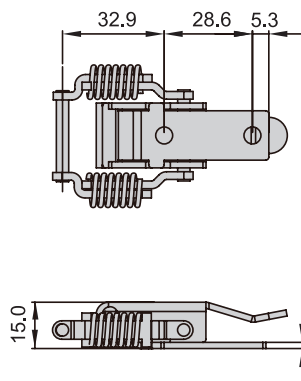

TSL-322



TSL-322P



TSL-322



TSL-322P


拉動型搭扣

Flexible. Over-center. Draw Latch


- 材質：黑色橡膠把手，不銹鋼固定扣 & 支架
- Material : Black Rubber Handle, Stainless Steel Mounting Hook & Bracket
- 最大靜載荷：45N
- Maximum Static Load : 45N




TS-609

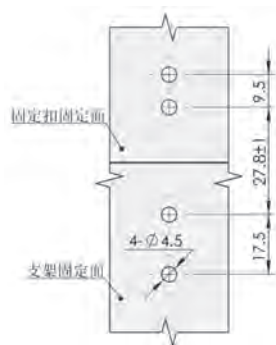

開孔尺寸 Cut Out



固定扣
Mounting Hook

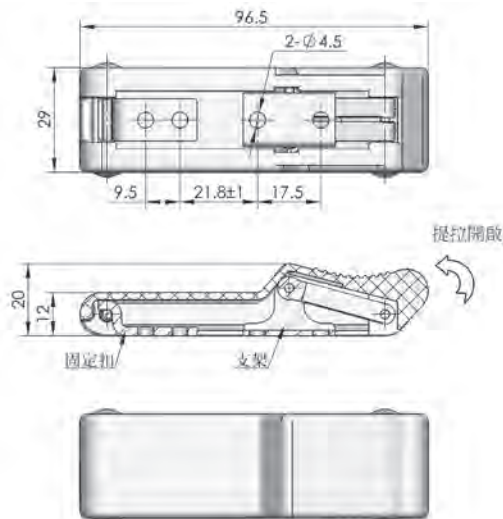

拉動開啟型


Draw Latch

橡膠搭扣




- 材質：把手 - 黑色橡膠，固定座及固定扣 - 不銹鋼
- Material : Handle - Black Rubber, Mounting Bracket & Hook - Stainless Steel
- 最大靜載荷：165N
- Maximum Static Load : 165N



TS-609-2



固定扣

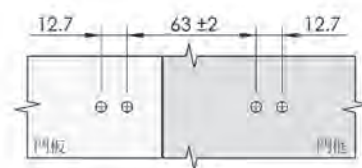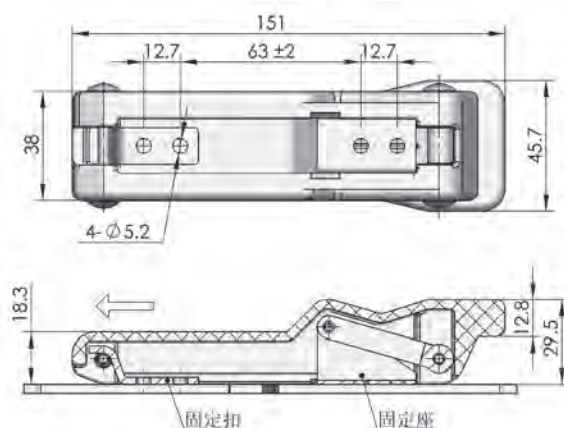


開孔尺寸 Cut Out

拉動型搭扣

Flexible. Over-center. Draw Latch

- 材質：黑色橡膠把手・不銹鋼 304 固定扣 & 支架
- Material: Black Rubber Handle, Stainless Steel 304 Mounting Hook&Bracket
- 最大靜載荷：200N
- Maximum Static Load: 200N
- 安全圓滑設計，吸收撞擊力，軟性材質可彌補安裝孔錯位誤差。
- Safe and sleek design, absorb impact force, soft material can make up for the misalignment error of the mounting hole
- 使用者可自行加裝掛鎖，提升安全性
- Install padlock to enhance anti-theft function

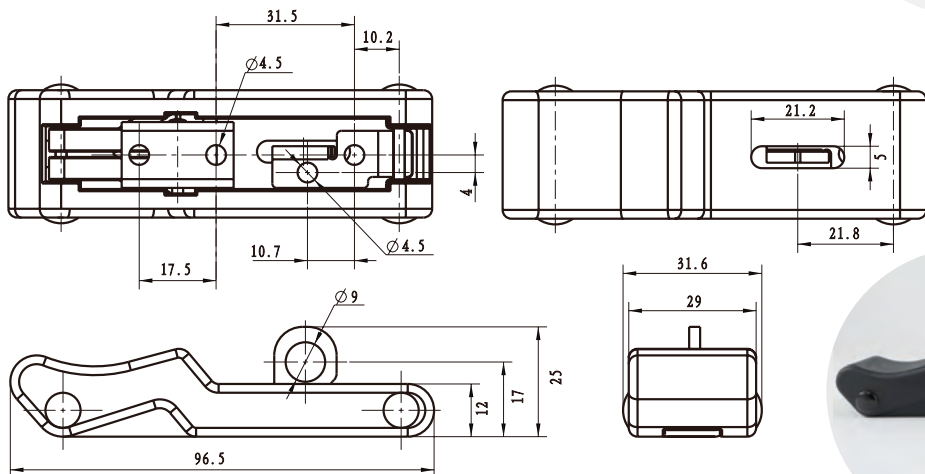


TS-609-UV-1P

拉動型橡膠箱扣 . 90 度直角安裝

90 degree vertical installation

- 材質：黑色橡膠把手，不銹鋼 304 固定扣 & 支架
 - Material: Black Rubber Handle, Stainless Steel 304 Mounting Hook&Bracket
 - 最大靜載荷：200N
 - Maximum Static Load: 200N
 - 安全圓滑設計，吸收撞擊力，軟性材質可彌補安裝孔錯位誤差。
 - Safe and sleek design, absorb impact force, soft material can make up for the misalignment error of the mounting hole
 - 直角安裝。
 - Right Angle installation
- 

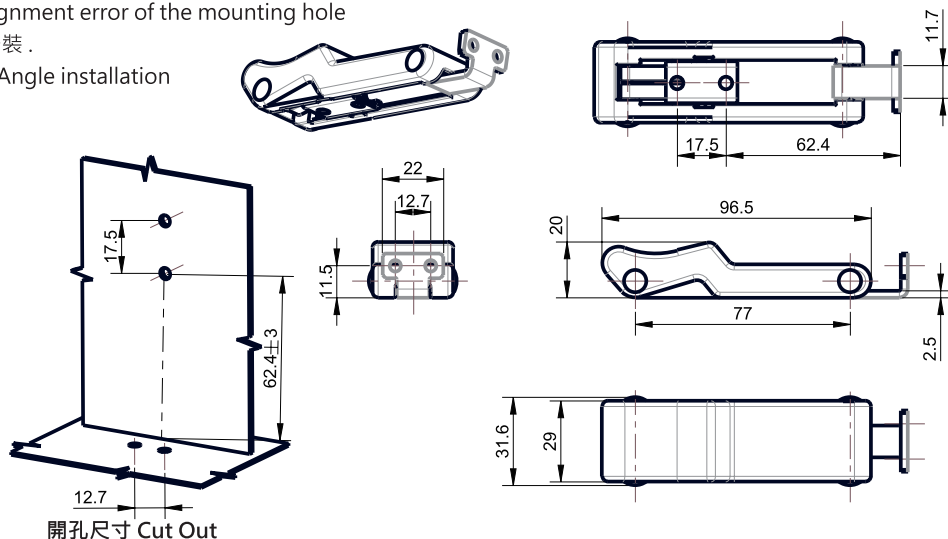

TS-609-UV-3



推動開啟 · 推入鎖定 · 塑料

Slide Latches, Push to Close






MS-725



MS-725-L
(增加鎖住功能)

- 材質：ABS
- Material：ABS
- 手指按壓三角箭頭方向，止動擋塊連動
- 內縮 6mm/m
- 適用板厚：1~2mm/m
- Panel thickness：1~2mm/m
- 最大靜載荷：200N
- Maximum Static Load：200N

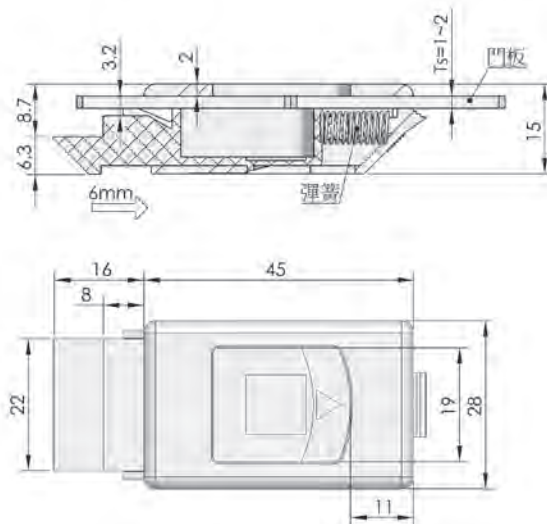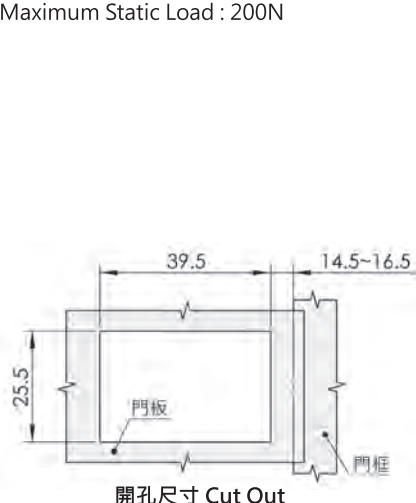

推入鎖定 · 帶鎖心 · 快速扣件




Push to Close. With locking core. Quick fastener

- 材質：PA6+30%GF 鎖體，鎖芯。
- 適用門板厚度：1~1.6mm
- 結構功能：鎖芯旋轉 180°實現鎖閉或開啟，搭配 0200 號鑰匙。


- Material：PA6+30%GF lock body, lock cylinder.
- Applicable door thickness：1~1.6mm
- Structural function: the lock cylinder rotates 180° to lock or open, With key No.：0200



MS-725-0200

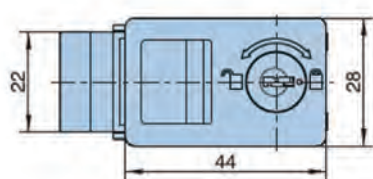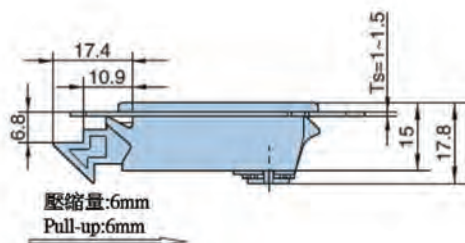

Unit: mm




開孔尺寸 Cut Out

按壓式門鎖


Push Latches



- 材質：不銹鋼
- Material: Stainless Steel
- 表面處理：振動研磨
- S.Tr: Vibration Polish

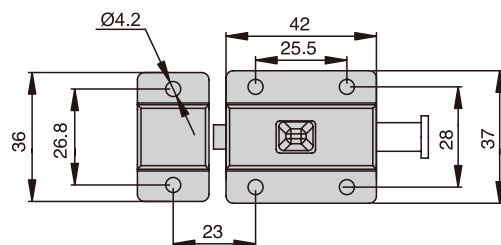

關閉狀態

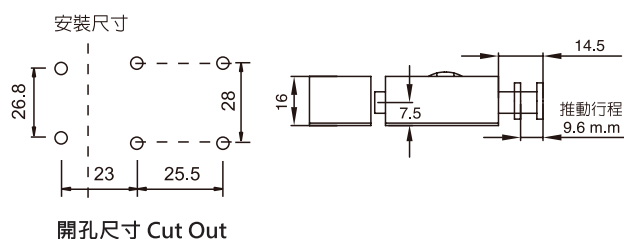

搭扣、門檔、
磁鐵門吸

DRAW LATCHES



MS-101-SUS

按壓開啟・鋅合金鎖扣



Push to close · Latches




- 材質：鋅合金 - 基座、按鈕、鎖舌
- Material: Zinc Alloy
- 表面處理：鍍鎳
- S.Tr: Nickel-plated
- 按壓按鈕行程 6.5m/m 時，鎖舌內縮 7m/m
- 適用板厚：1~8m/m
- Panel thickness: 1~8 m/m
- 最大靜載荷：400N



鎖舌內縮狀態



開孔尺寸 Cut Out

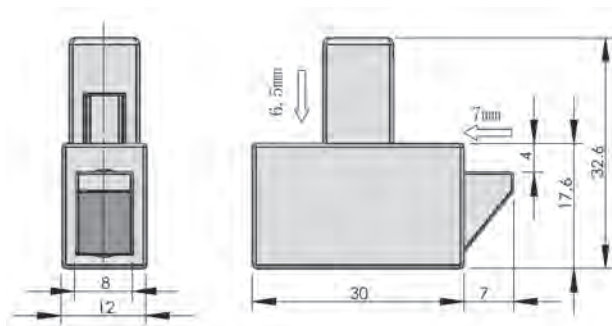

TS-637

埋入型搭扣鎖・滑動開啟


Push to Close · Paddle Latches

- 材質：ABS(黑色)
- Material: ABS(Black)
- 工作溫度範圍：-40°c ~ 60°c
- 適用板厚：1.2~1.6mm
- Panel thickness: 1.2~1.6 mm
- 最大靜載荷：500N
- Maximum Static Load: 500N






MS-725-5

1. 推動鎖的前部穿過鉸金開孔，按壓向前

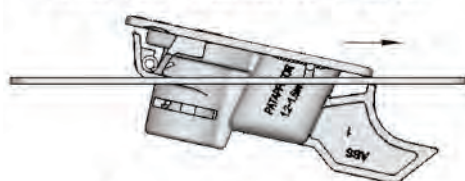

2. 按壓後端，卡入定位

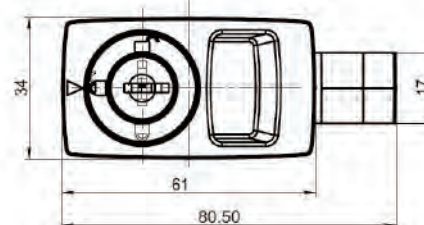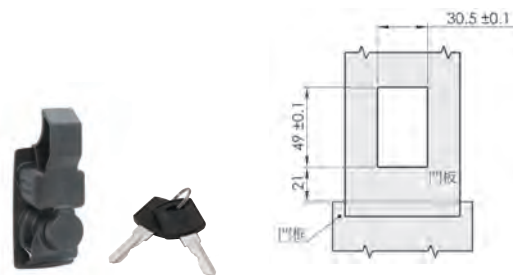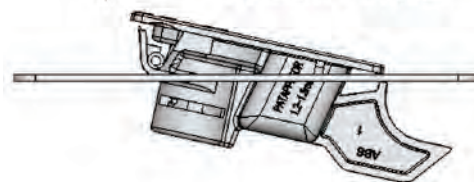


拉動開啟

Lift to open



- 材質：PA6+GF30%(黑色)
- Material: PA6+GF30% (Black)
- 工作溫度範圍：-40°c ~ 60°c
- 適用板厚：1.5mm
- Panel thickness: 1.5 mm
- 最大靜載荷：245N
- Maximum Static Load: 245N



MS-725-7



開孔尺寸 Cut Out

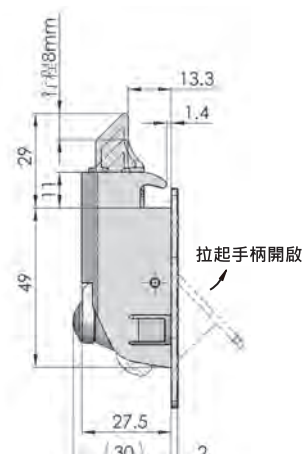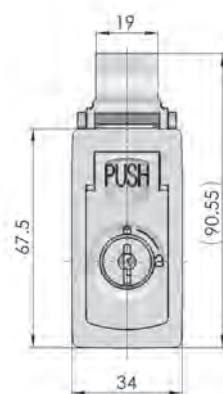


拉動開啟型

Draw Latch

SUS 304 RoHS

- 材質：不銹鋼 304
- Material : Stainless Steel 304
- 最大靜載荷：140N
- Maximum Static Load : 140N

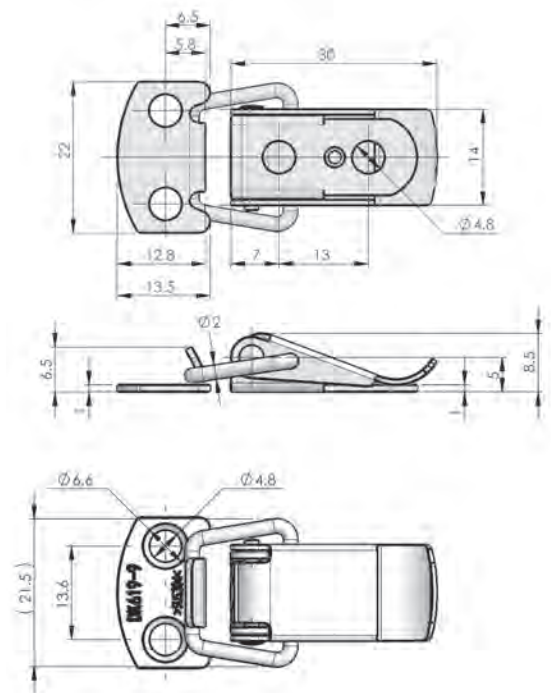

搭扣、門檔、 磁鐵門吸

DRAW LATCHES




TS-619-9

不鏽鋼箱扣・帶安全壓鈕

Draw Latch . with safety button

SUS 304 RoHS

- 材質：不鏽鋼 304
- Material: Stainless Steel 304
- 表面處理：震動拋光
- S.Tr: Vibration Polishing
- 特點：獨特的自鎖結構設計，防止搭扣在使用過程中意外彈開，操作便捷，安全性佳。
- Features: Unique self-locking structure design to prevent the buckle from accidentally popping open during use, Easy to operate and safe.
- 適用於：機械設備 / 軍工設備 / 車輛 / 食品機械
- Applicable to: machinery equipment/military equipment/vehicles/food machinery

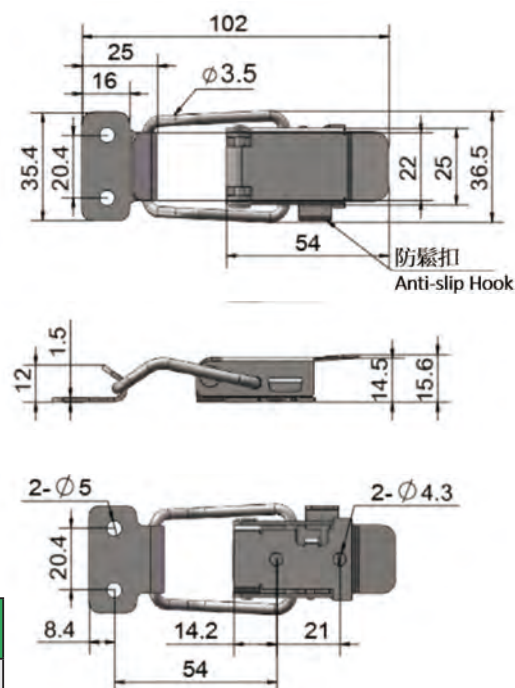

TS-102-SS





型號 Item No	材質 Material	鎖緊力 Locking load	極限載荷 Ultimate load
TS-102-SS	SUS304	500N	4000N

磁鐵拍門器

Magnetic catches



單管

- 材質：ABS
- Material：ABS
- Push to Close and Push to Open

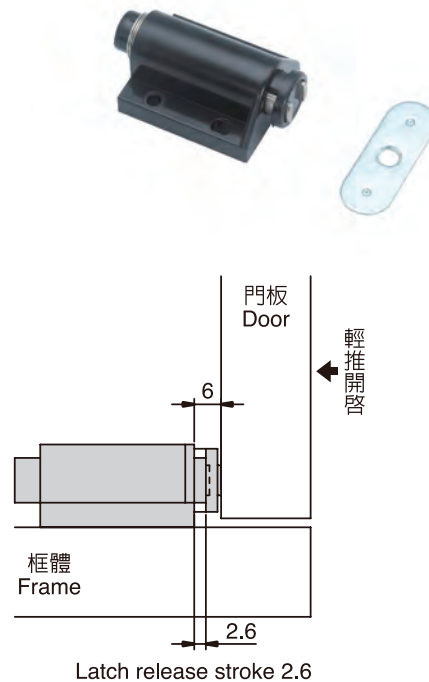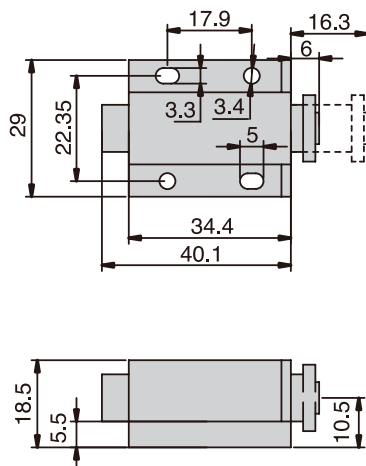

雙管

- 材質：ABS
- Material：ABS
- Push to Close and Push to Open

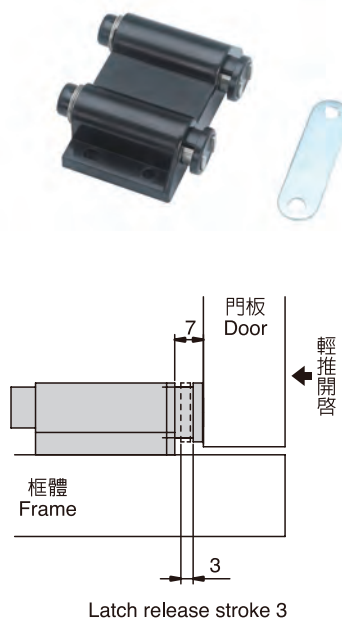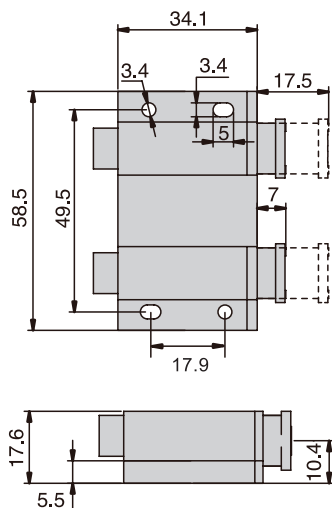

TK-713B

TK-714B



上偏心・可調間距・拉動開啟・附掛鎖孔

Adjustable Series Draw Latches With padlock hole

搭扣、門檔、
磁鐵門吸




DRAW LATCHES

- 材質：不銹鋼 304、鋼鐵
- Material : Stainless Steel 304、Steel-zinc plated
- 表面處理：震動研磨或鍍鋅
- S.Tr : Vibration Polish or Zinc plated
- 使用：旋轉 Y 型螺桿，可調整至適當距離
- Operation : Suitable latching distance can be adjusted by rotating the Y type screw

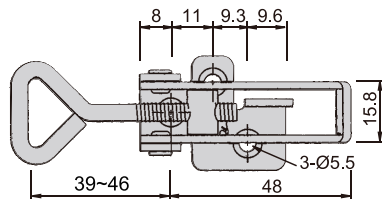





Unit:m/m

型號 Item No	材質 Material
TS-260	不銹鋼 304 Stainless steel304
TS-260-ST	鐵鍍鋅 Steel-zinc plated

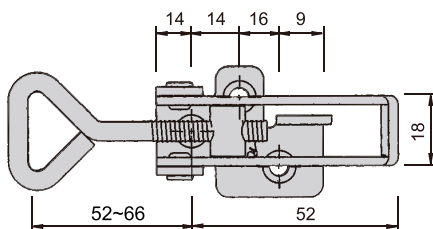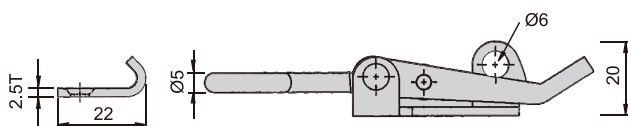

Unit:m/m

型號 Item No	材質 Material
TS-270	不銹鋼 304 Stainless steel304
TS-270-ST	鐵鍍鋅 Steel-zinc plated

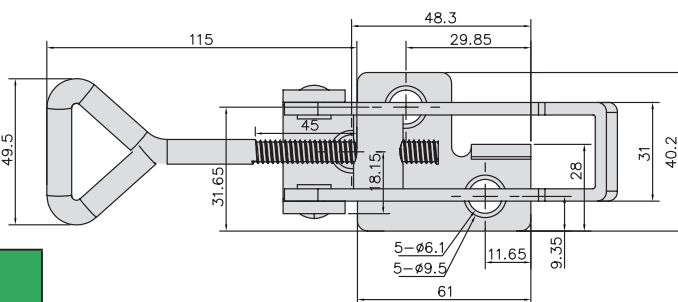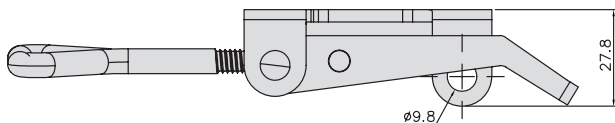

型號 Item No	材質 Material
TS-280	不銹鋼 304 Stainless steel304
TS-280-ST	鐵鍍鋅 Steel-zinc plated



TS-260



TS-270



TS-280

銅雙珠門擋 · 拉動開啟 · 推入鎖定


Copper Ball Latches · Push to Close

- 材質：銅
- Material : Copper
- 表面處理：原色
- S.Tr: Natural finish
- 可微調鋼珠夾持力
- With adjustable grip tightness




TK- 系列

安裝示意 ①




正向安裝

②



側向安裝

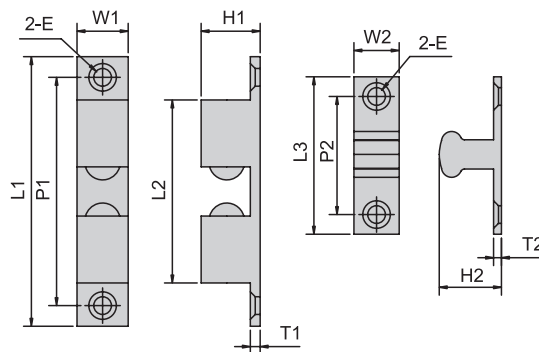

型號 Item No.	L1	L2	L3	W1	W2	H1	H2	T1	T2	P1	P2	E	夾持 (kg)
TK-40	40	24	24	7.6	6.8	10	10	1.8	2	32	15	3.4	1
TK-44	44	27	26	8	6.8	10	10	2	2	35	15	3.4	1.5
TK-49	49	31	29	9	7.8	10.8	10.8	2	2	40	19.7	3.8	2
TK-60	60	36	35	11	9	13	13	2.2	2.2	50	24	4.6	2.5
TK-69	69	47	40	13	11.5	15	15	2.2	2.2	58	30	4.8	5

拉動開啟型 · 可調間距 · 附掛鎖座



Draw Latch



- 材質：不銹鋼 316
- Material : Stainless Steel 316
- 最大靜載荷：750N
- Maximum Static Load : 750N




TS-614

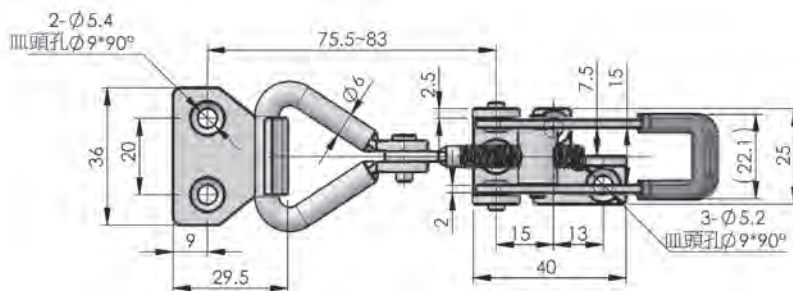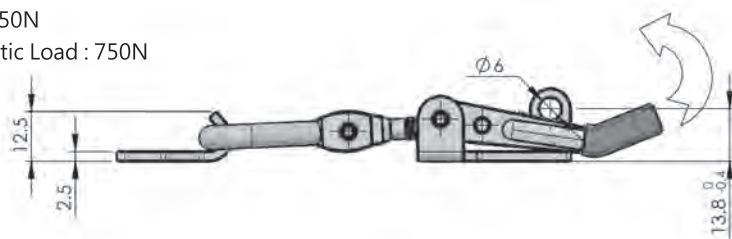

拉動開啟型・搭扣・隱藏安裝

Draw Latch・Rotary・Concealed


- 材質：鐵製
- Material：Steel
- 表面處理：三價鋅
- S. Tr：Zinc Plated

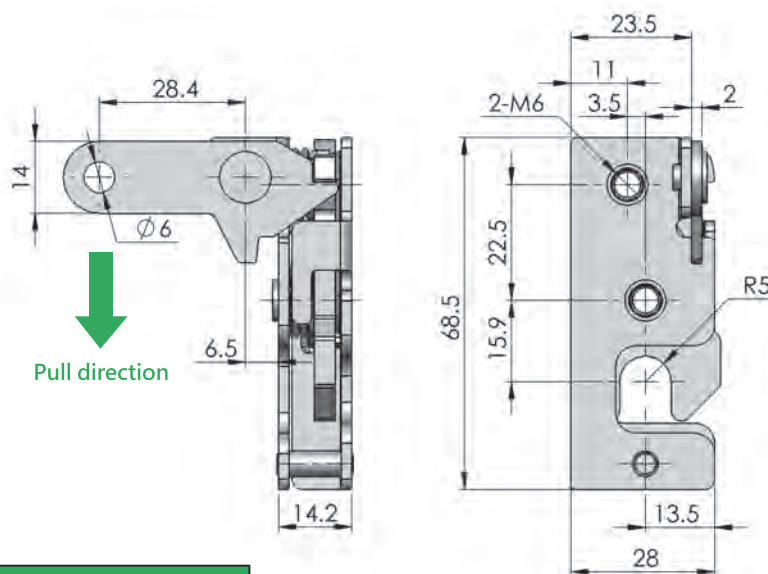

圖示為 TS-618-6L

型號 Item No	特徵描述 SPEC
TS-618-6L	左開門 For Left Opening
TS-618-6R	右開門 For Right Opening

- 材質：鐵製
- Material：Steel
- 表面處理：三價鋅
- S. Tr：Zinc Plated

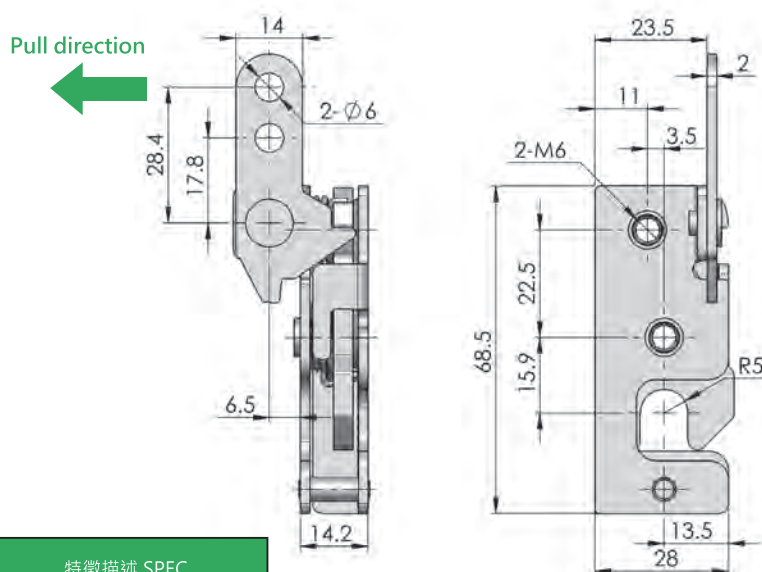

圖示為 TS-618-7L

型號 Item No	特徵描述 SPEC
TS-618-7L	左開門 For Left Opening
TS-618-7R	右開門 For Right Opening


拉動開啟型・搭扣・隱藏安裝

Draw Latch · Rotary · Concealed

- 材質：鐵製
- Material : Steel
- 表面處理：三價鋅
- S. Tr : Zinc Plated



圖示為 TS-618-8L

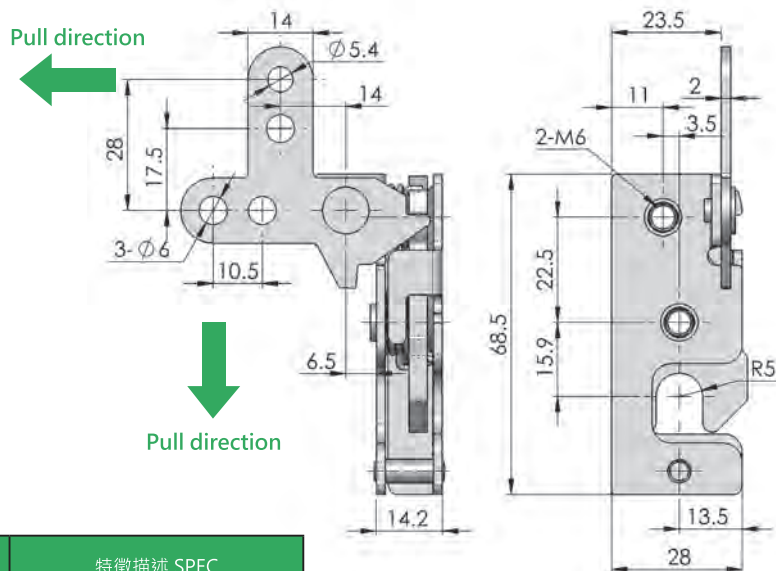


型號 Item No	特徵描述 SPEC
TS-618-8L	左開門 For Left Opening
TS-618-8R	右開門 For Right Opening



圖示為 TS-618-9R

- 材質：鐵製
- Material : Steel
- 表面處理：三價鋅
- S. Tr : Zinc Plated

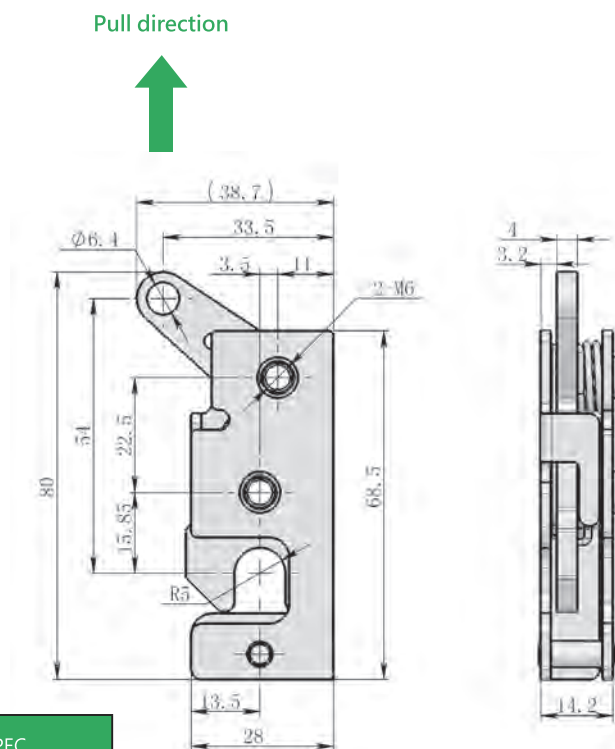

型號 Item No	特徵描述 SPEC
TS-618-9L	左開門 For Left Opening
TS-618-9R	右開門 For Right Opening

拉動型搭扣 · 鹽霧測試通過 240Hour


Draw Latch



搭扣、門檔、 磁鐵門吸

DRAW LATCHES


- 材質：鋅合金，不銹鋼固定架
- Material : Zinc Alloy · Stainless steel Mounting Plate
- 表面處理：電鍍亮鉻、黑色塗裝
- S.Tr : Bright chrome plated · Black powder coated
- 另有無鎖芯式供訂製
- Also available without lock
- 不受門板厚度及左右開門限制
- 使用 6 顆 M3 平頭螺絲安裝 (不提供)
- Install assembly with six M3 flat head screws(not supplied)
- 最大靜載荷：650N
- Maximum Static Load : 650N

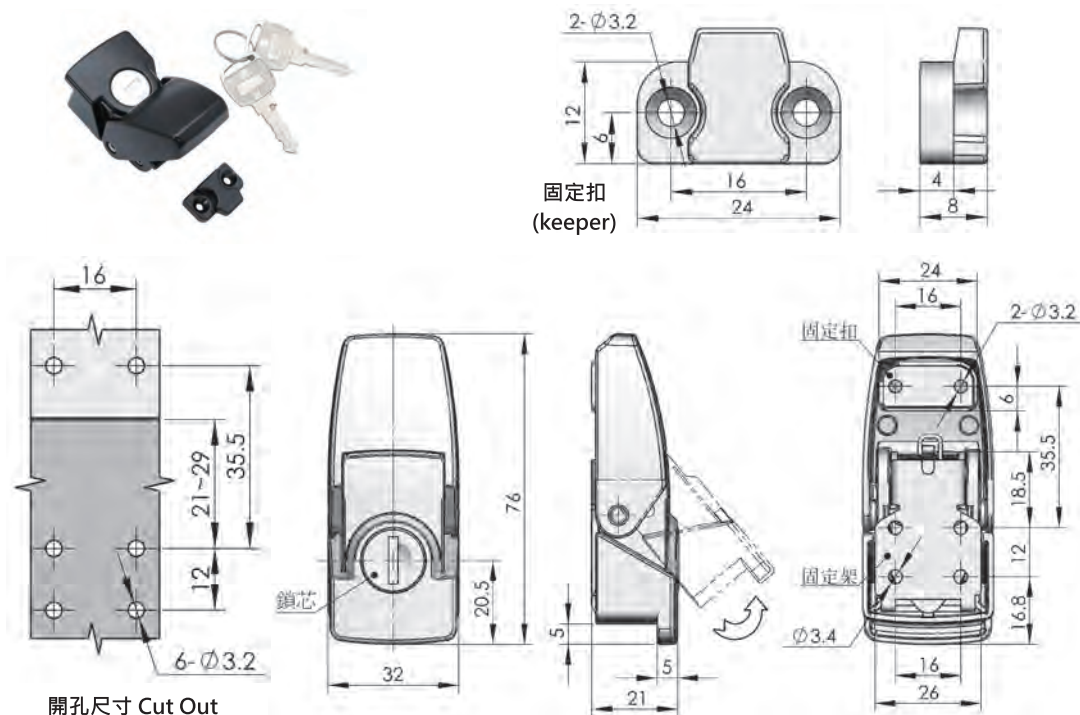


DKS-1
(CHROME)



DKS-2
(BLACK)

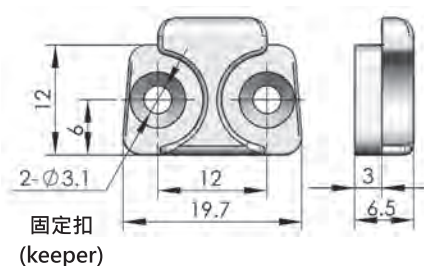

DKS-3
(CHROME)

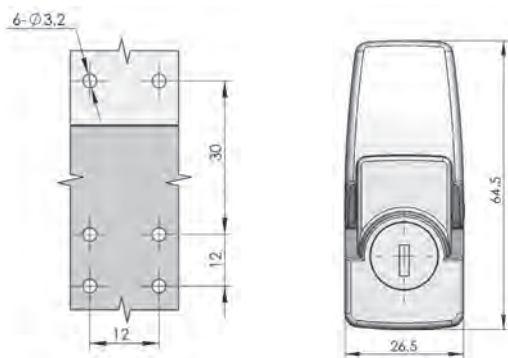

DKS-4
(BLACK)



PP 門擋

Door Stopper


- 材質：PP
- Material：PP
- 板件撞擊緩衝使用
- Use as impact buffer for metal plates



PP-001



PP-002

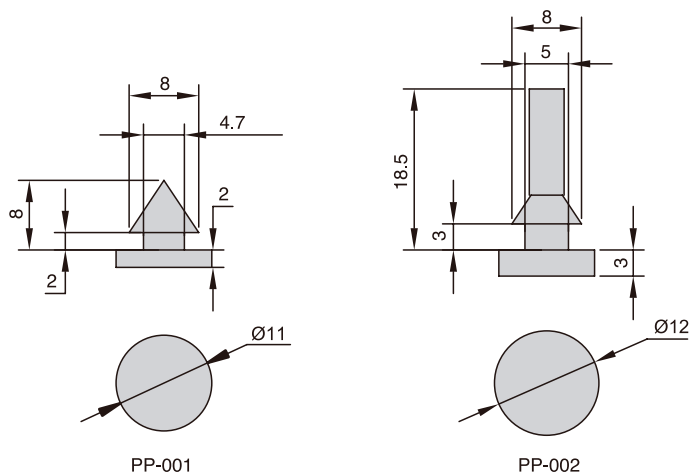


磁鐵門擋

Magnetic catches

- 材質：主體 (POM)、吸附板：不銹鋼 430
- Material：Body (POM)、Catch：SUS 430
- 防止粉塵發生，適用於無塵室環境或設備機台
- Prevents entry of dust, suitable for clean rooms environment or equipment



TK-4821

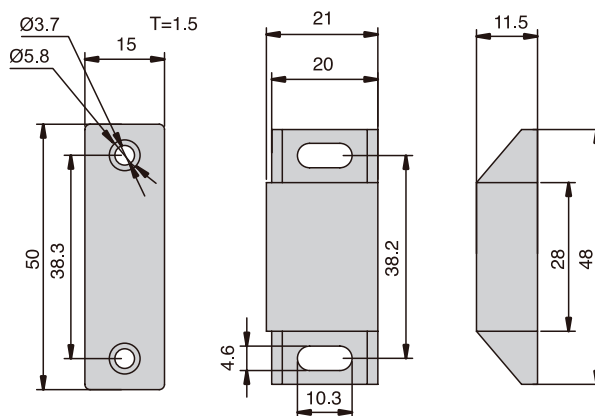

吸附力 Attract Strength : 3kgf


可調型自鎖搭扣

Over Center Rubber Draw Latch

搭扣、門檔、
磁鐵門吸

DRAW LATCHES

- 材質：複合橡膠及不鏽鋼
 - 特點：橡膠主體具有減震功能，可保持對連接物體的彈性預壓。具有迫緊壓縮功能
 - 耐溫：20° ~90°
 - 用途：車輛引擎蓋 / 機器外罩 / 震動型機械
- Material : EPDM & Stainless steel 304
 - Features : The rubber has a shock absorption function, which can maintain the elastic preload of the connecting object. Compression Latch
 - Temperature resistance : 20° ~90°
 - Application : Vehicle hood/machine cover/ vibration type machinery.

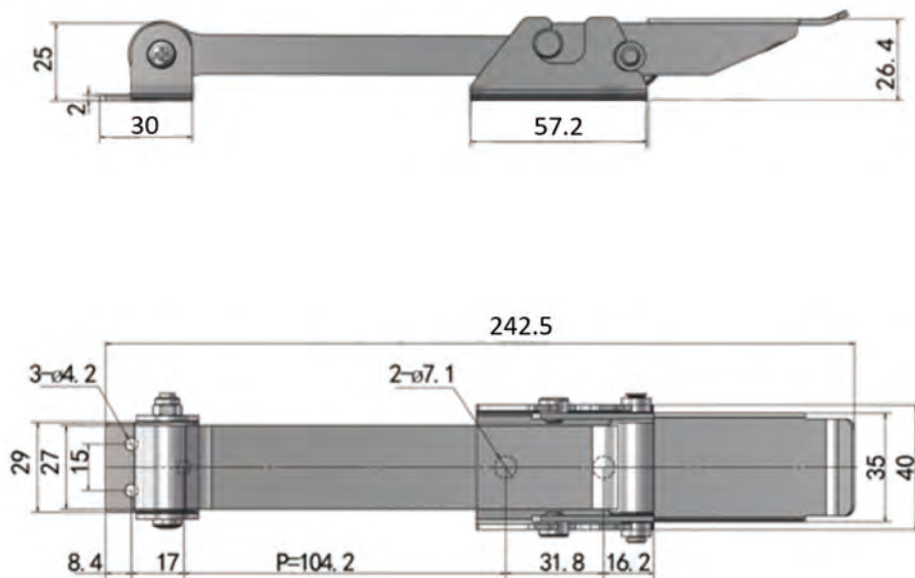

TS-611-S



型號 Item No	材質 Material	鎖緊力 Locking load			極限載荷 Ultimate load
		P	P+4	P+8	
TS-611-S	SUS304	100N	150N	200N	250N

防振直角迫緊型搭扣




Adjustable Series Draw Latches With padlock hole



TS-321-1
TS-321-2
TS-321-3

- 材質：不鏽鋼 304 (SUS304)
- 表面處理：振動拋光
- 特點：可安裝於箱體轉角處，壓縮彈簧具有彈性預壓和減振功能
- 安全防鬆扣裝置可以避免因振動或人員造成的誤開啟，安全穩固
- 用途：自動化機械設備，振動型機械，壓縮機，及各式環境設備。

- Material: Stainless Steel 304
- Finish: Vibration Polish
- Features: Can be installed at the corner of the cabinet.
- compression spring inside, reduce vibration& apply
- Prepressing. Unique self-lock design, prevent the latch accidental opening, enhancing security.

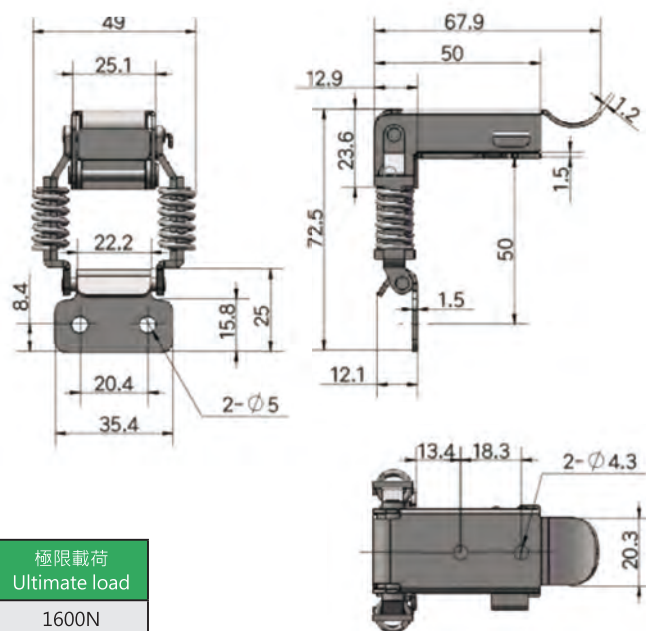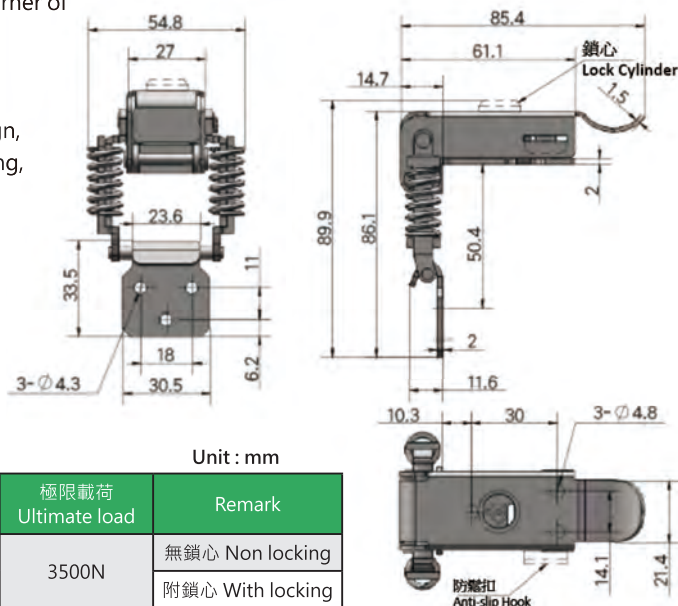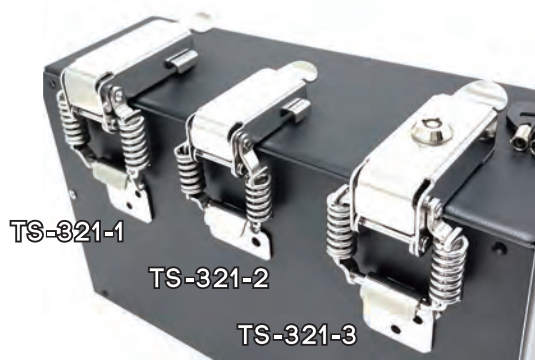

型號 Item No	材質 Material	鎖緊力 Locking load	極限載荷 Ultimate load
TS-321-2	SUS304	400N	1600N



不鏽鋼雙珠門擋・撞擊關閉


SUS Ball Latches.Push To Close

搭扣、門檔、
磁鐵門吸


DRAW LATCHES

- 材質：不鏽鋼 304
- 表面處理：鏡面拋光
- 最大靜載荷：30KG
- 適用於車輛，船舶設備及食品機械的門板固定可微調夾持力

- Material : Stainless Steel 304
- STr : Bright Polishing
- MAX Load weight : 30KG
- Used in Doors of Vehicle, Vessel, and other Equipment, etc.

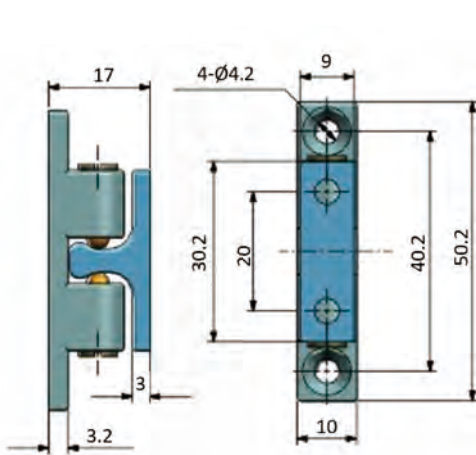

TS-50-SS

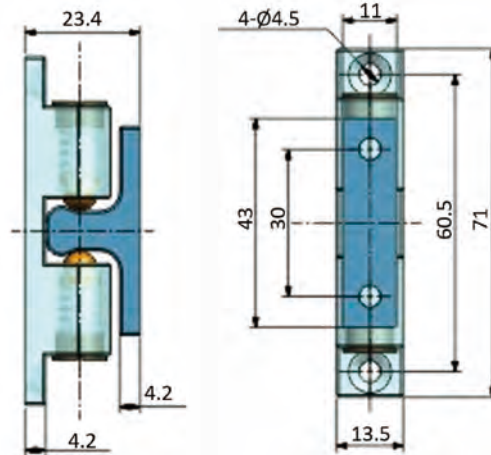

TS-71-SS



TS-50-SS

TS-71-SS




平面嵌入・按壓開啟・推入鎖定



LIFT-TO-OPEN. FLUSH. PUSH-TO-CLOSE LATCH



- 材質：主體、拉手 -ABS+PC，鎖芯 -PC，鎖舌 -ABS，螺絲 - 不銹鋼
- Material : Body & Handle – ABS + PC, Lock Cylinder – PC, Cam – ABS, Screw – Stainless Steel
- 表面處理：本色 (黑)
- S. Tr : Black (Natural Finish)
- 最大靜載荷：480N
- Maximum Static Load : 480N
- 標配 K164 鑰匙

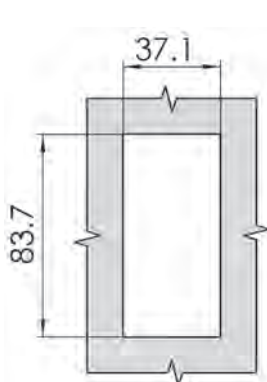

開孔尺寸 Cut Out

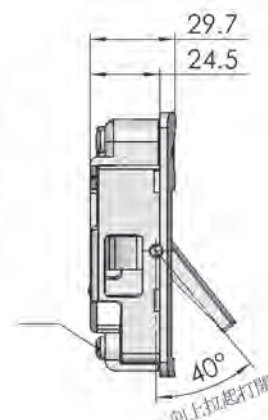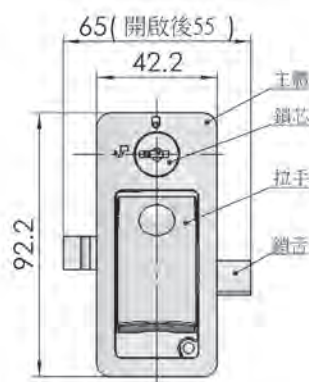

MS-725-8


門鎖・拉動式・撞擊關閉

Latches. Push to Close



- 材質 & 表面：鐵材質鍍鋅
- 最大靜載荷：320N
- 推回門板，門鎖前端圓弧斜面滑入門框，可自動形成鎖閉，狹窄空間也可安裝，減少干涉，亦可搭配連桿使用。

- Material & Surface : Steel & Zinc plated
- Maximum static load : 320N
- When push back the door, the Front slides into the door frame with the arc slope, which can automatically lock. It can also be installed in narrow spaces to reduce interference, and can also be used with connecting rods.

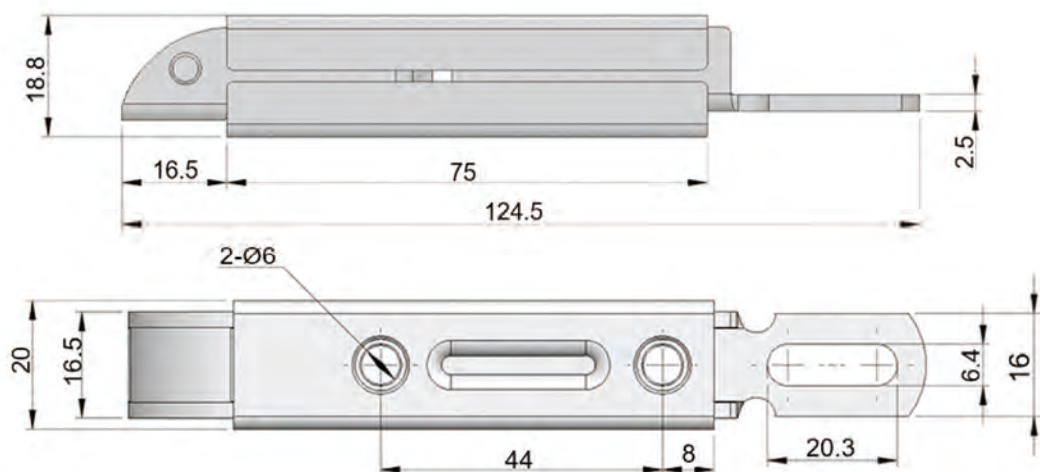


拉動型門鎖・撞擊關閉

Latches. Push to Close



- 材質 & 表面：鐵材質鍍鋅
- 最大靜載荷：250N
- 推回門板，門鎖前端圓弧斜面滑入門框，可自動形成鎖閉，狹窄空間也可安裝，減少干涉。

- Material & Surface : Steel & Zinc plated
- Maximum static load : 250N
- When push back the door, the Front slides into the door frame with the arc slope, which can automatically lock. It can also be installed in narrow spaces to reduce interference.

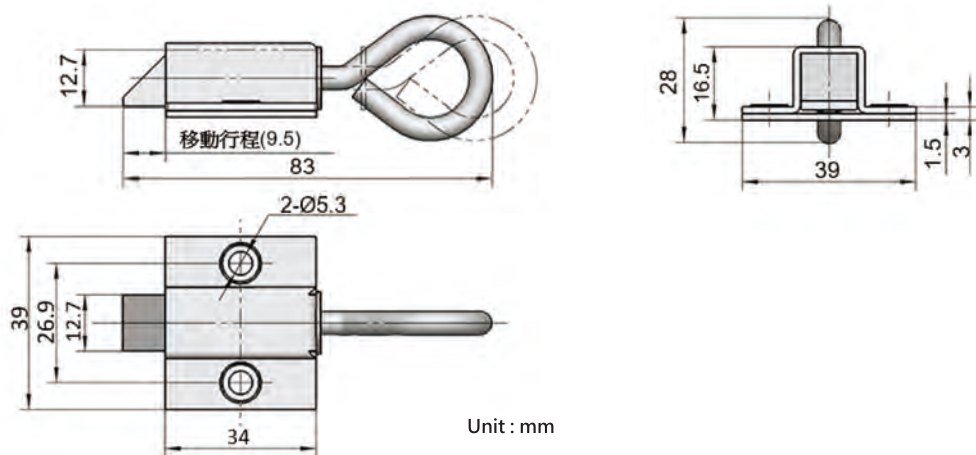

Unit : mm



TS-6340




可調間距搭扣 · 拉動開啟 · 帶安全鈕

Adjustable Draw Latch. Pull to Open. Safety Button



- 材質：不鏽鋼 (SUS304)
- 表面處理：震動研磨
鎖緊力：400N
- 極限載荷：3.5KN
- 特點：旋轉 Y 型螺桿可調節距離改變鎖緊力，拉手柄帶安全防鬆鈕結構，自鎖結構防止誤開啟，鎖緊强度高，可重承載。
- 用途：車輛 / 醫療機械 / 工程機械
- Material : Stainless Steel (SUS304)
- S.Tr : vibration grinding
- Locking force : 400N
- Ultimate load : 3.5KN
- Features : Rotating the Y-shaped screw can adjust the distance to change the locking force the pull handle has a safety anti-loosening button structure, the self-locking structure prevents accidental opening, the locking strength is high, and it can be heavy-loaded.
- Application : Vehicle/Medical Machinery/ Construction Machinery

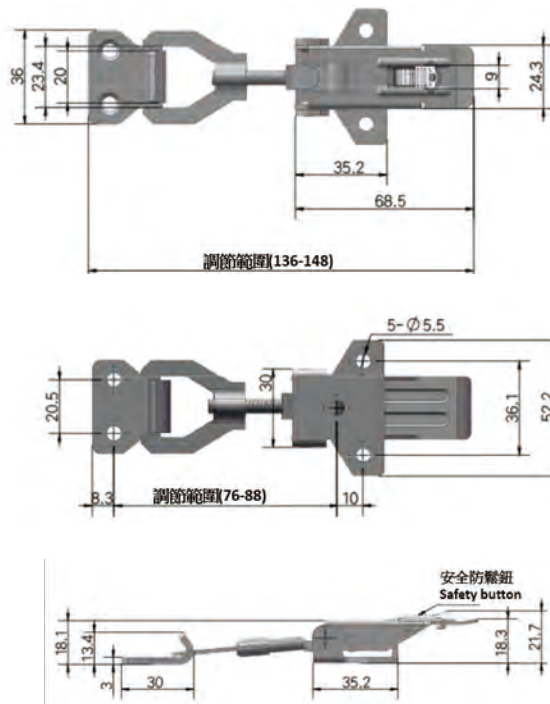搭扣、門檔、
磁鐵門吸

DRAW LATCHES



TS-922-SS




伺服器上蓋搭扣 · 滑動助開器

Sliding Cover Latch. Use for SERVER



- 材質：手柄 & 滑塊 - 鋅合金；基座 - 鐵鍍鋅。
- 手柄開啟到 120 度限位
- 手柄與滑塊直接接觸，傳動結構高效用滑塊將卡簧壓在底部，方便裝配搭扣整體厚度比一般標準品約薄 3~4mm，為機箱內部提供更大的使用空間
- 專利產品

- Material: Handle & Slider - Zinc Alloy ;
- Base - steel .
- Handle opened to the 120 degree limit. The handle is in direct contact with the slider, and the transmission structure is efficient. Use the slider to press the circlip to the bottom for easy assembly. The Latch overall thickness is about 3~4mm thinner than the general standard product. Provide more space for use inside the chassis.
- Patented

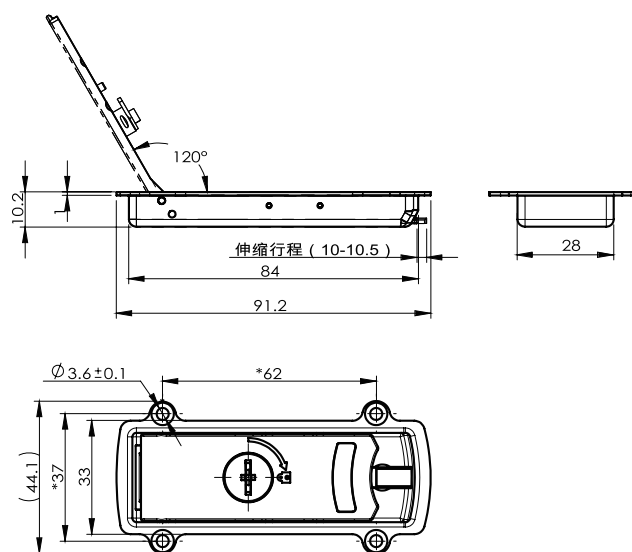

YSB-0210-2



拉動型橡膠搭扣・減振 & 壓縮

Flexible.Over-center.Draw Latch. Shock Absorbing Compression





TS-610 SERIES



- 材質：複合橡膠；
固定座：尼龍 + 玻纖 (PA+GF30%)
- 複合橡膠主體具有減振功能，可保持對連接體的彈性預壓，T 型手柄開閉省力，外型美觀，符合人體工學。安全圓滑設計，吸震，軟性材質可彌補安裝孔錯位誤差不導電、抗紫外線、能吸收振動，使物件消除振動噪音並提高穩定度。
- 適用於工具箱 / 工程機械罩 / 農用機械 / 露營車內裝

- Material : Composite rubber ;
Fixed bracket: PA+GF30%.
- The composite rubber body has shock absorption function, which can maintain the elastic preload of the connecting body. The T-shaped handle is labor-saving to open and close, beautiful in appearance and ergonomic. Safe and sleek design, absorbing impact force, soft material can compensate for the misalignment of mounting holes
- Suitable for tool box/construction machinery cover/agricultural machinery/RV Camper Interior.

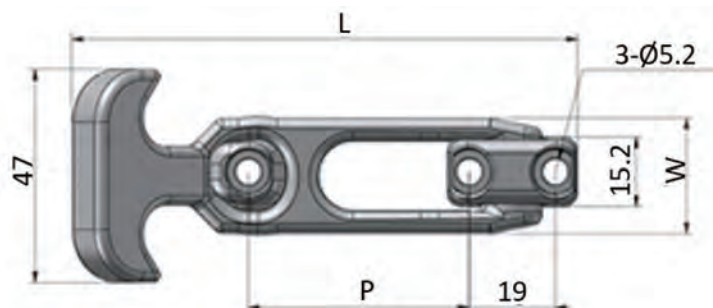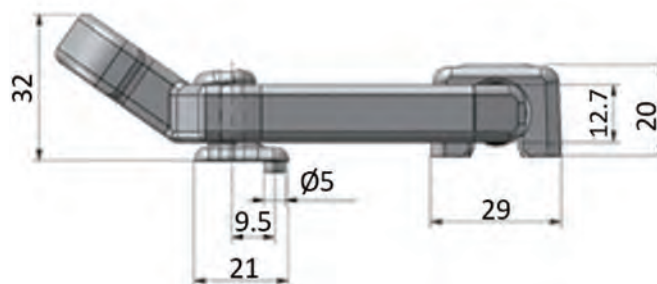

Unit : mm

型號 Item No	材質 Material	L	W	P	鎖緊力 Locking load			極限載荷 Ultimate load
TS-610-1	橡膠	110	25	43	P	P+4	P+8	300N
TS-610-2		160	32	65	50N	90N	130N	
TS-610-3		200	32	106	80N	110N	145N	
					95N	120N	160N	


重承載型不鏽鋼箱扣

Heavy Duty Toggle Latches. Large




- 材質：不鏽鋼 304(SUS304)
- 表面處理：拋光
- 鎖緊力：2000N
- 極限載荷：6000N
- 特點：重承載，鎖緊力度強大，重型門板設備關閉解決方案。
- 用途：工程機械 / 冷凍櫃 / 大型烘烤箱



- Material : Stainless Steel 304
- Finis h: Polish
- Locking load : 2000N
- Ultimate load : 6000N
- Features : Heavy load, strong locking force, closing solution for heavy door panel equipment.
- Application: construction machinery/freezer/large oven

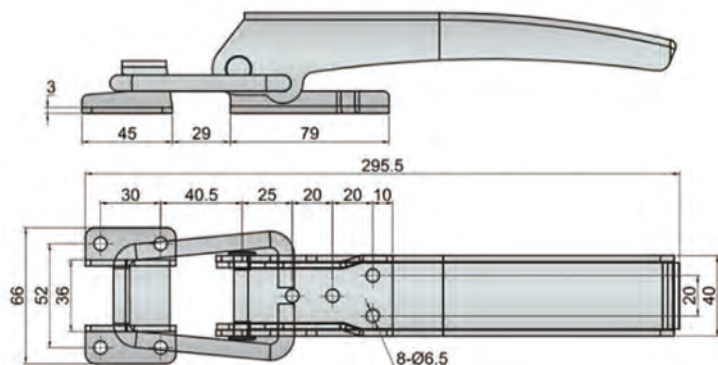


TS-166-1-SS

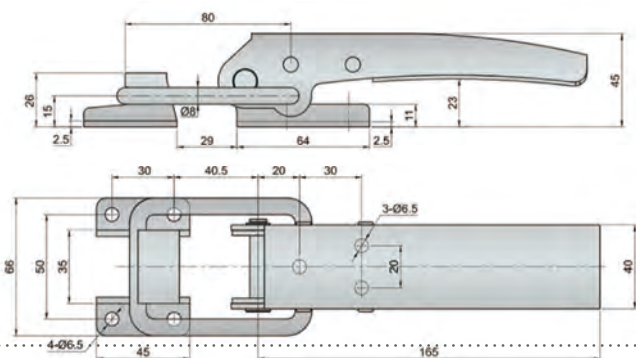

TS-166-2-SS

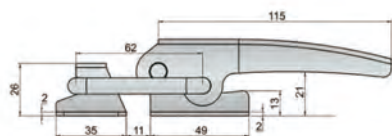

TS-166-3-SS

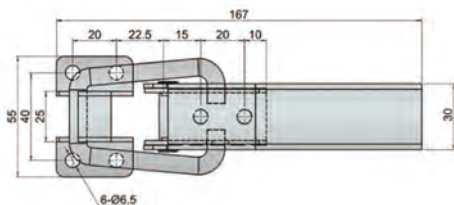

搭扣、門檔、
磁鐵門吸

DRAW LATCHES



TS-166-1-SS
TS-166-2-SS
TS-166-3-SS

[illegible]